


MEET YOUR NEW SHOP MVP!



RSC4000



RSC4000BP

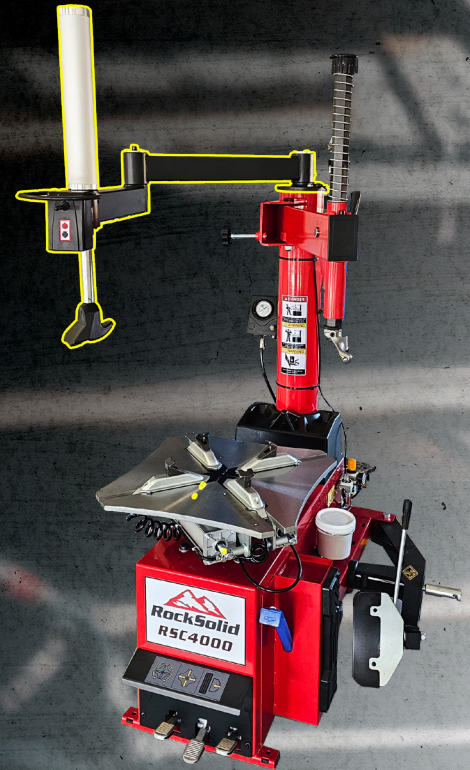

RSC4BP231

FEATURES

- Dual Cylinder Clamping
- Adjustable Jaws, Allen Key Required
- Built-In Inflator Gauge
- Adjustable Bead Breaker Shovel
- 2 Way Transmission, Clockwise + Counterclockwise
- Upgraded Mount Head
- Built-In Bead Blaster
- Built-In Bead Press Arm
- Plastic Protection
- Reinforced Swing Arm
- Filter/Lubricator
- Hex Shaft with Improved lock
- Hardened Steel Mount/Demount Head With Plastic Inserts

SPECIFICATIONS

- Outside Clamping Range: 10-24"
- Inside Clamping Range: 15-26"
- Max Wheel Diameter: 42"
- Turntable Rotation Speed: 6.5rpm
- Net weight/Gross weight: 235/269lbs
- Tire Width: 3"-14"
- Working Air Pressure: 115-145 psi
- Power requirements: 110V 1Ph, 15 Amp
- Noise: <70dB

OPTIONAL ACCESSORIES



ROCKSOLID EQUIPMENT | PRODUCT CATALOG
PRICES SUBJECT TO CHANGE WITHOUT NOTICE.

SWING ARM TIRE CHANGER

WITH BEAD PRESS ARM

RSC4000



BUILT-IN INFLATION AND
PRESSURE GAUGE



FILTER - REGULATOR -
LUBRICATOR




DUAL-CLAMPING
CYLINDERS



RESPONSIVE CONTROL
PEDALS

			
3"-14"	10"-24"	42"	15"-26"

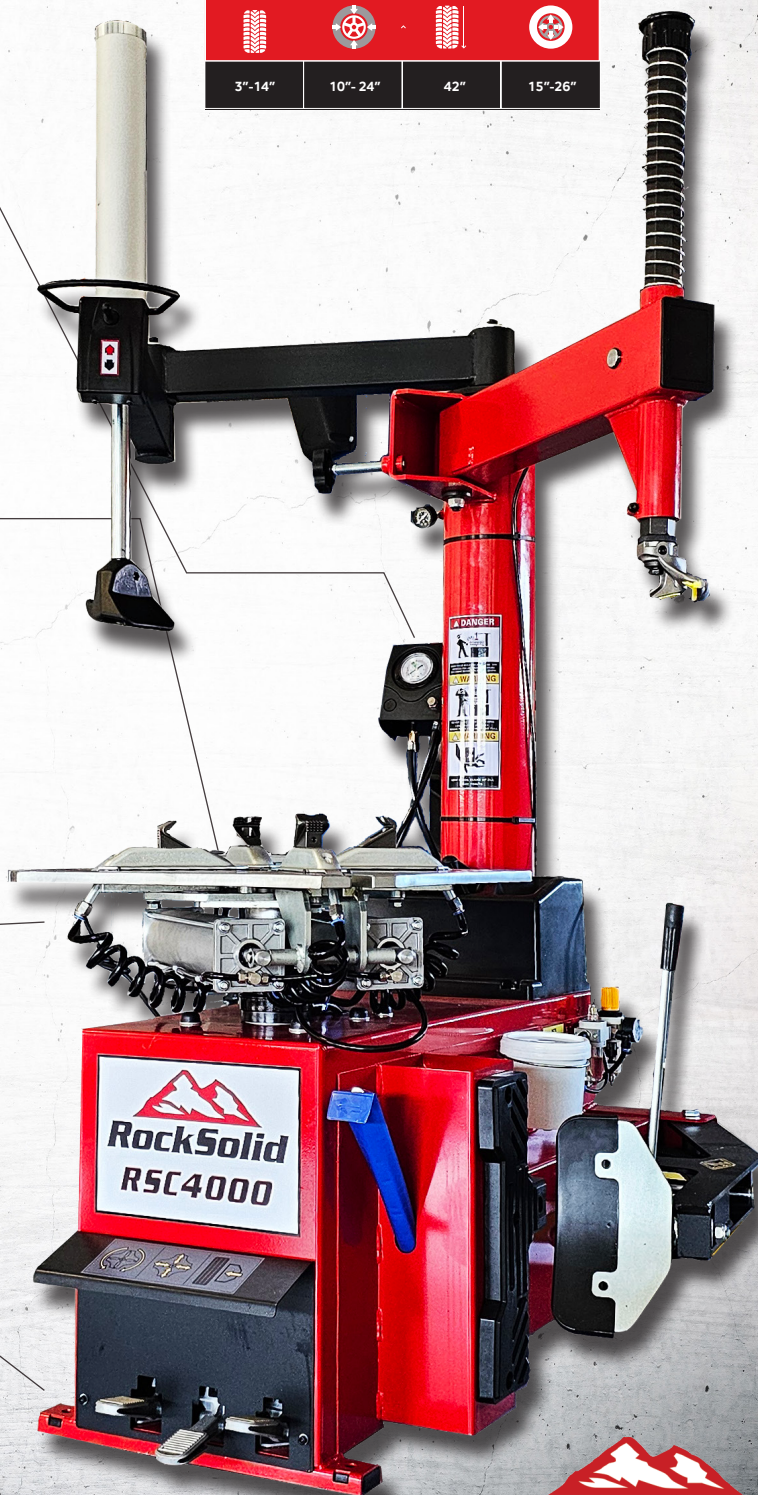

1 YEAR
WARRANTY
WITH LOCAL SERVICE